





IPC-615G2-Q370 V2.0

Industrial Computer



Support 8-9th Generation Intel® Core/Pentium/Celeron Processors,
LGA1151



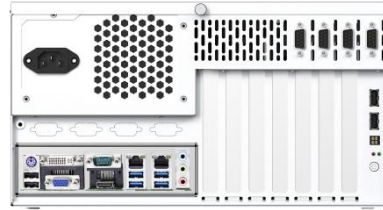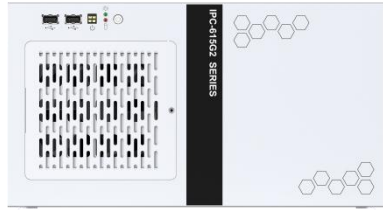


Specifications:



Processor	CPU	Intel® Core™ 8th/9th i7 / i5 / i3 / Pentium / Celeron, LGA1151
	Chipset	Intel® Q370
Memory	Architecture	Support DDR4 2400
	Capacity	up to 64GB
	DIMM	4 * U-DIMM Slot
Display	DVI	Supports DVI-D with max resolution up to 1920x1200@60Hz
	VGA	Supports max resolution up to 1920x1200@60Hz
	HDMI	Supports max resolution up to 4096x2160@30Hz
	Multi-channel display	Supports three asynchronous displays
Lan	LAN1	Intel GbE LAN controller
	LAN2	Intel GbE LAN controller
Audio	Port	Optional
I/O	COM	4xRS232, 1 x RS232 or RS485(com3), 1 x RS232 or RS485 or 422(com4)
	PS2	1 x PS2 Port (Keyboard & Mouse)
	USB	4 x USB3.0, 4 x USB2.0
Other	PCIe	1 x PCIe x16 slot, 4 x PCIe x4 slot
	PCI	2 x 32bits PCI slot
	HDD	1 x 2.5" HDD Bay, 1 x 3.5" HDD Bay
	SSD	1 * full size mSATA SSD
	RAID	Support RAID 0, 1, 5, 10
	WatchDog	255 seconds programmable
OS	Microsoft Windows	Windows10
	Linux	Ubuntu
Power	Type	ATX
	Power Adapter	AC180~264V
	Power Dissipation	Depending on the CPU (elect 300W, 400W, 500W, 600W, 750W)
Mechanism Parameters	Box structure	Hot dip galvanized sheet steel shell
	Mounting	Desktop installation
	Dimensions (L*W*H)	370mm x 327.5mm x187.2mm
	NW	8.2KG
Environmental	Work Temperature	-20 ~ 60° C (-4°F~140°F) (Using Wide Temperature Grade Solid State Hard Dis)
		0 ~ 45° C (32 °F ~113 °F) (Use normal temperature grade mechanical hard disk)
	Storage Temperature	-40 ~ 80°C (-40°F~185°F)
	Relative humidity	5~95% (No condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-27, Half-sine wave, 11ms duration
	EMC	CE/FCC Class B
Safety Certification	CCC	

Dimensions:

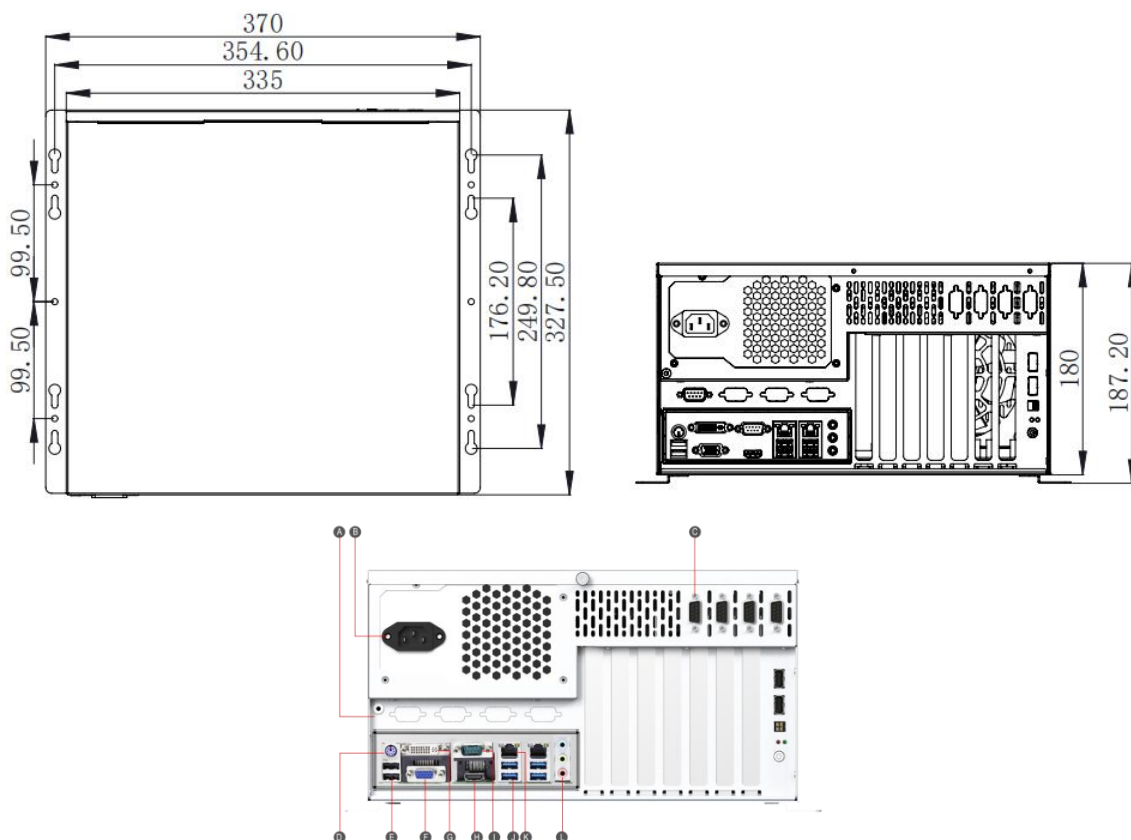

A: Ground	B: AC 220V	C: Optional
D: PS2	E: USB2.0	F: VGA
G: DVI	H: HDMI	I: COM1
J: USB3.0	K: LAN	L: Audio

Ordering Information:

Product Type	Description
IPC-615G2-Q370-P300	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2×LAN/8×USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 300W power/Two-year warranty
IPC-615G2-Q370-P400	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2×LAN/8×USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 400W power/Two-year warranty
IPC-615G2-Q370-P500	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2×LAN/8×USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 500W power/Two-year warranty
IPC-615G2-Q370-P600	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2×LAN/8×USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 600W power/Two-year warranty
IPC-615G2-Q370-P750	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2×LAN/8×USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 750W power/Two-year warranty