



IPC-615H-H81 V3.0

Industrial Computer



4U, 19" s tandard rack-mount IPC
LGA1150 Gen 4th Intel E3/i7/i5/i3/G








IPC-615H-H81



Specifications :



Processor	CPU	Intel Core i3,i5,i7,E3,Pentium,Celeron, LGA1150
	Chipset	Intel® H81
Memory	Architecture	Support DDR3 2400
	Capacity	up to 16GB
	DIMM	2 * U-DIMM Slot
Display	DVI	Supports DVI-D with max resolution up to 1920x1200@60Hz
	VGA	Supports max resolution up to 1920x1200@60Hz
	HDMI	Supports max resolution up to 4096x2160@30Hz
	Multi-channel display	Supports asynchronous dual display
LAN	LAN1	Intel GbE LAN controller
	LAN2	Intel GbE LAN controller
Audio	Port	Optional
I/O	COM	5xRS232, 1 x RS232 or RS485 or RS422(COM1)
	PS2	1xPS2 Port (Keyboard & Mouse)
	USB	2 x USB3.0, 6 x USB2.0
Other	PCIe	1 x PCIe x16 slot, 1 x PCIe x4 slot (X1 signal)
	PCI	5 x 32bits PCI slot
	HDD	1 x 2.5" HDD Bay, 1 x 3.5" HDD Bay
	SSD	1 * full size mSATA SSD
	WatchDog	255 seconds programmable
OS	Microsoft Windows	Windows 7, Windows 10
	Linux	Ubuntu
Power	Type	ATX
	Power Adapter	AC180~264V
	Power Dissipation	Depending on the CPU (elect 300W, 400W, 500W, 600W, 750W)
Mechanism Parameters	Box structure	Hot dip galvanized sheet steel shel
	Mounting	19" s tandard rack-mount IPC
	Dimensions (L*W*H)	481mm x 430mm x 177mm (18.9" * 16.9" * 6.9")
	NW	9.62kg
Environmental	Work Temperature	-20 ~ 60° C (-4°F ~ 140°F) (Using Wide Temperature Grade Solid State Hard Dis)
		0 ~ 45° C (32 °F ~ 113 °F) (Use normal temperature grade mechanical hard disk)
	Storage Temperature	-40 ~ 80°C (-40°F ~ 185°F)
	Relative humidity	5~95% (No condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class B
Safety Certification	CCC	

Dimensions:

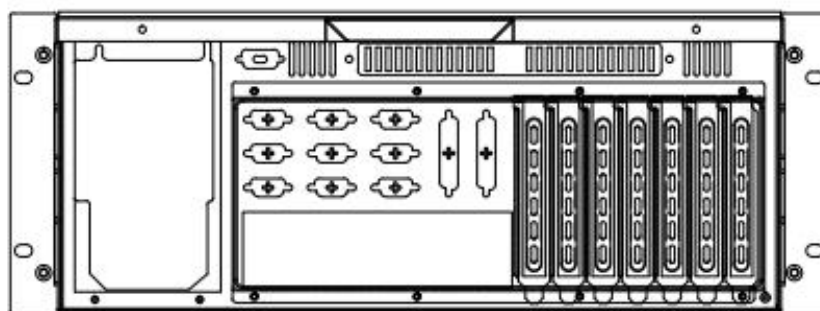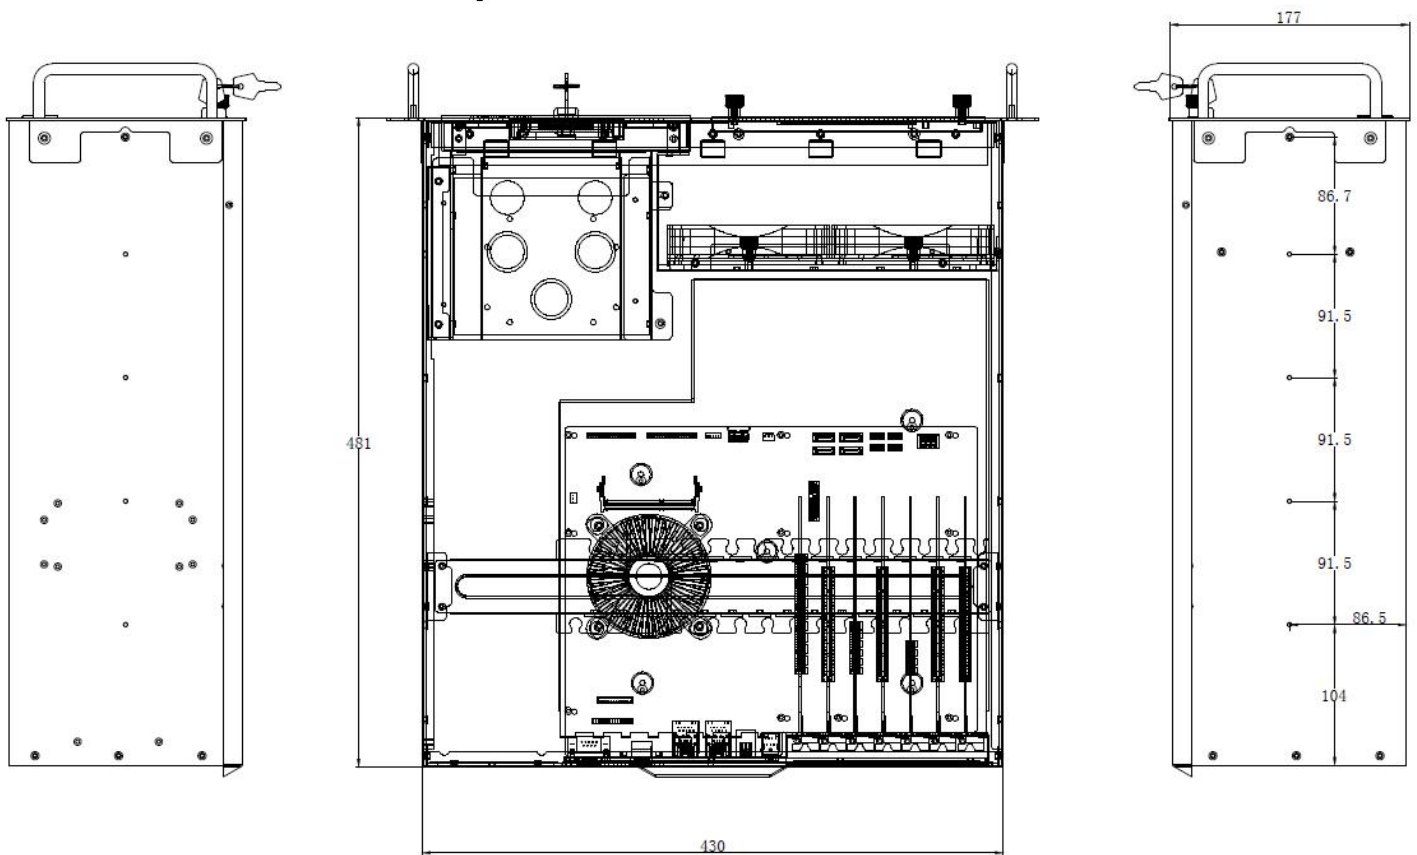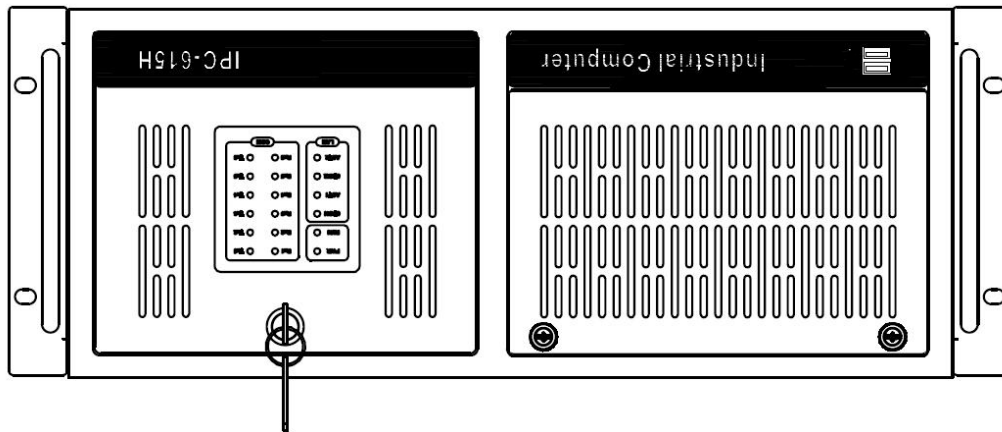

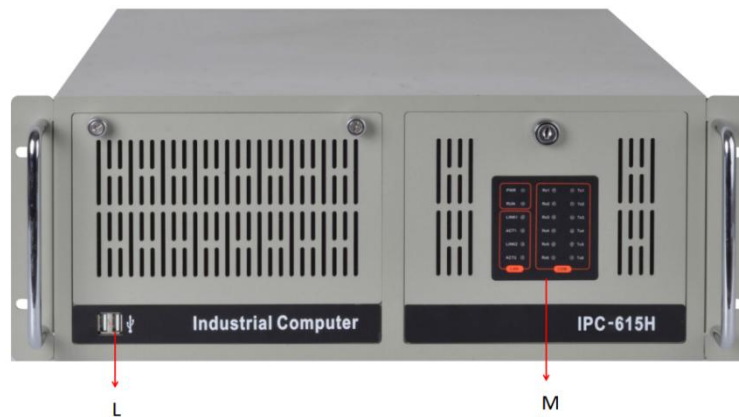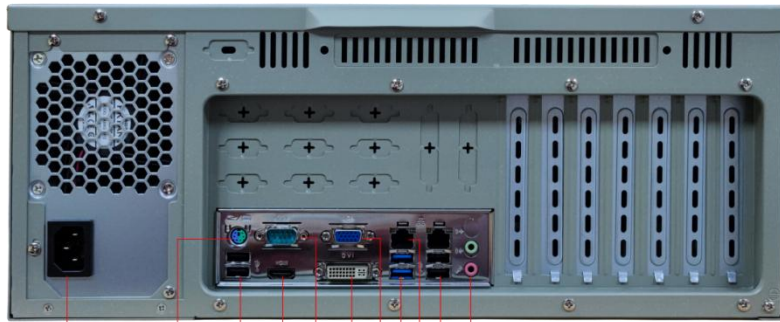

A: AC IN	B: PS/2	C: USB 2.0*2
D: HDMI	E: COM1	F: DVI
G: VGA	H: USB3.0*2	I: LAN*2
J: USB2.0*2	K: AUDIO	L: USB2.0*2
M: LED		

Ordering Information:

Product Type	Description
IPC-615H-H81-P300	NO CPU/NO SODIMM/5*RS232/1* (RS232/485/422) /2×LAN/8×USB2.0(Include 2xUSB3.0)/DVI/VGA/HDMI/5xPCI/2xPCI-E / Power 300W/AC IN 220V / Two-year warranty
IPC-615H-H81-P400	NO CPU/NO SODIMM/1*RS232/1* (RS232/485/422) /2×LAN/8×USB2.0(Include 2xUSB3.0)/DVI/VGA/HDMI/5xPCI/2xPCI-E / Power 400W/AC IN 220V / Two-year warranty
IPC-615H-H81-P500	NO CPU/NO SODIMM/5*RS232/1* (RS232/485/422) /2×LAN/8×USB2.0(Include 2xUSB3.0)/DVI/VGA/HDMI/5xPCI/2xPCI-E / Power 500W/AC IN 220V / Two-year warranty
IPC-615H-H81-P600	NO CPU/NO SODIMM/5*RS232/1* (RS232/485/422) /2×LAN/8×USB2.0(Include 2xUSB3.0)/DVI/VGA/HDMI/5xPCI/2xPCI-E / Power 600W/AC IN 220V / Two-year warranty
IPC-615H-H81-P750	NO CPU/NO SODIMM/5*RS232/1* (RS232/485/422) /2×LAN/8×USB2.0(Include 2xUSB3.0)/DVI/VGA/HDMI/5xPCI/2xPCI-E / Power 750W/AC IN 220V / Two-year warranty

