



# IPC-615H-Q370 v2.0

## Industrial Computer

4U, 19" s tandard rack-mount IPC

Support 8-9th Generation Intel® Core/Pentium/Celeron Processors,LGA1151





## Specifications :



Processor	CPU	Support 8-9th Generation Intel® Core/Pentium/Celeron Processors, LGA1151
	Chipset	Intel® Q370
Memory	Architecture	Support DDR4 2400/2600MHz
	Capacity	up to 64GB
	DIMM	4 * U-DIMM Slot
Display	DVI	Supports DVI-D with max resolution up to 1920x1200@60Hz
	VGA	Supports max resolution up to 1920x1200@60Hz
	HDMI	Supports max resolution up to 4096x2160@30Hz
	VGA+HDMI	Yes, VGA + HDMI+DVI
Lan	LAN1	Intel GbE LAN controller
	LAN2	Intel GbE LAN controller
Audio	Port	Optional
I/O	COM	4xRS232, 1 x RS232 or RS485(com4), 1 x RS232 or RS485 or 422(com3)
	LPT	N/A
	PS2	1xPS2 Port (Keyboard & Mouse)
	USB	4 x USB3.0/2.0, 4 x USB2.0
Other	Digital IO	N/A
	WatchDog	255 seconds programmable
	PCIe	1 x PCIe x16 slot, 4 x PCIe x4 slot
	PCI	2 x 32bits PCI slot
	HDD	1 x 2.5" HDD Bay, 1 x 3.5" HDD Bay
	SSD	1 * full size mSATA SSD
	DVD	1* 5.25" DVD-RW
OS	Microsoft Windows	Windows 10
	Linux	Ubuntu
Power	Type	ATX
	Power Adapter	AC180~264V
	Power Dissipation	Depending on the CPU ( Default built-in 400W power )
Mechanism Parameters	Box structure	Hot dip galvanized sheet steel shel
	Mounting	19" s tandard rack-mount IPC
	Dimensions (L*W*H)	481mm x 430mm x 177mm (18.9" * 16.9" * 6.9")
	NW	9.62kg
Environmental	Work Temperature	-20 ~ 60° C (-4°F~140°F) ( Using Wide Temperature Grade Solid State Hard Dis )
		0 ~ 45° C (32 °F ~113 °F ) (Use normal temperature grade mechanical hard disk )
	Storage Temperature	-40 ~ 80°C (-40°F~185°F)
	Relative humidity	5~95% (No condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class B
Safety Certification	CCC	

**Dimensions :**

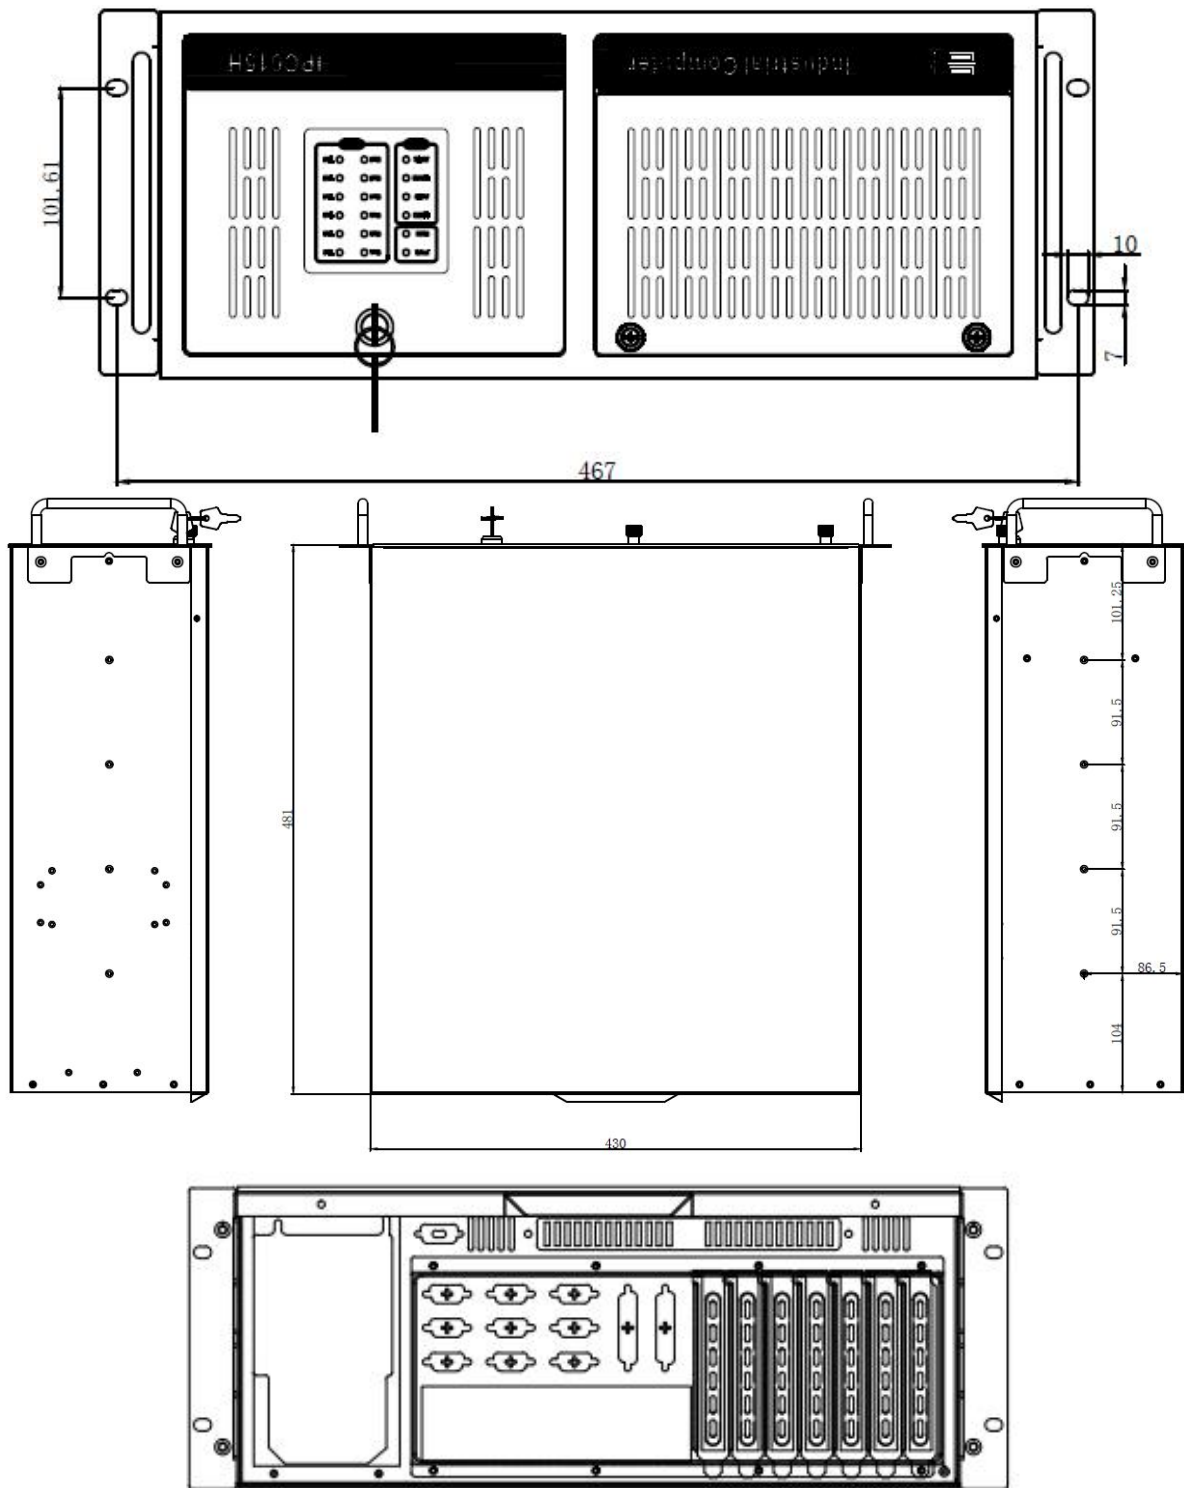

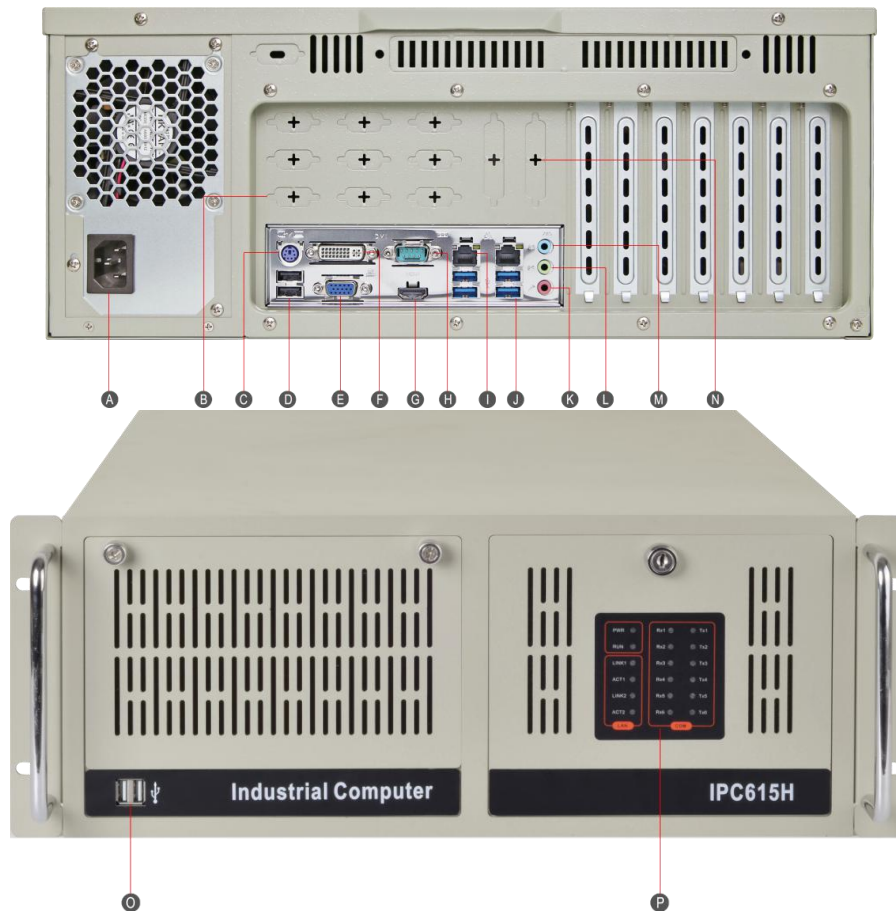

A: AC IN	B: Optional	C: PS/2
D: USB2.0	E: VGA	F: DVI
G: HDMI	H: COM1	I: LAN
J: USB3.0	K: MIC IN	L: Line OUT
M: Line IN	N: Optional	O: USB2.0
P: LED		

## Ordering Information :

Product Type	Description
<b>IPC-615H-Q370-P300</b>	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2 × LAN/8 × USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 300W power/Two-year warranty
<b>IPC-615H-Q370-P400</b>	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2 × LAN/8 × USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 400W power/Two-year warranty
<b>IPC-615H-Q370-P500</b>	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2 × LAN/8 × USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 500W power/Two-year warranty
<b>IPC-615H-Q370-P600</b>	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2 × LAN/8 × USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 600W power/Two-year warranty
<b>IPC-615H-Q370-P750</b>	NO CPU/NO SODIMM/4*RS232/1* (RS232/485) /1* (RS232/485/422) /2 × LAN/8 × USB2.0(Include 4xUSB3.0)/DVI/VGA/HDMI/2xPCI/5xPCI-E / AC IN 220V / Built-in 750W power/Two-year warranty